


# Using a TCS34725 RGB Color Sensor

## What is the TCS34725 RGB Color Sensor?

The TCS3472 sensor provides a digital return of red, green, blue (RGB), and clear light sensing values. An RGB Color sensor helps you accurately detect an object's colour in your Arduino projects.

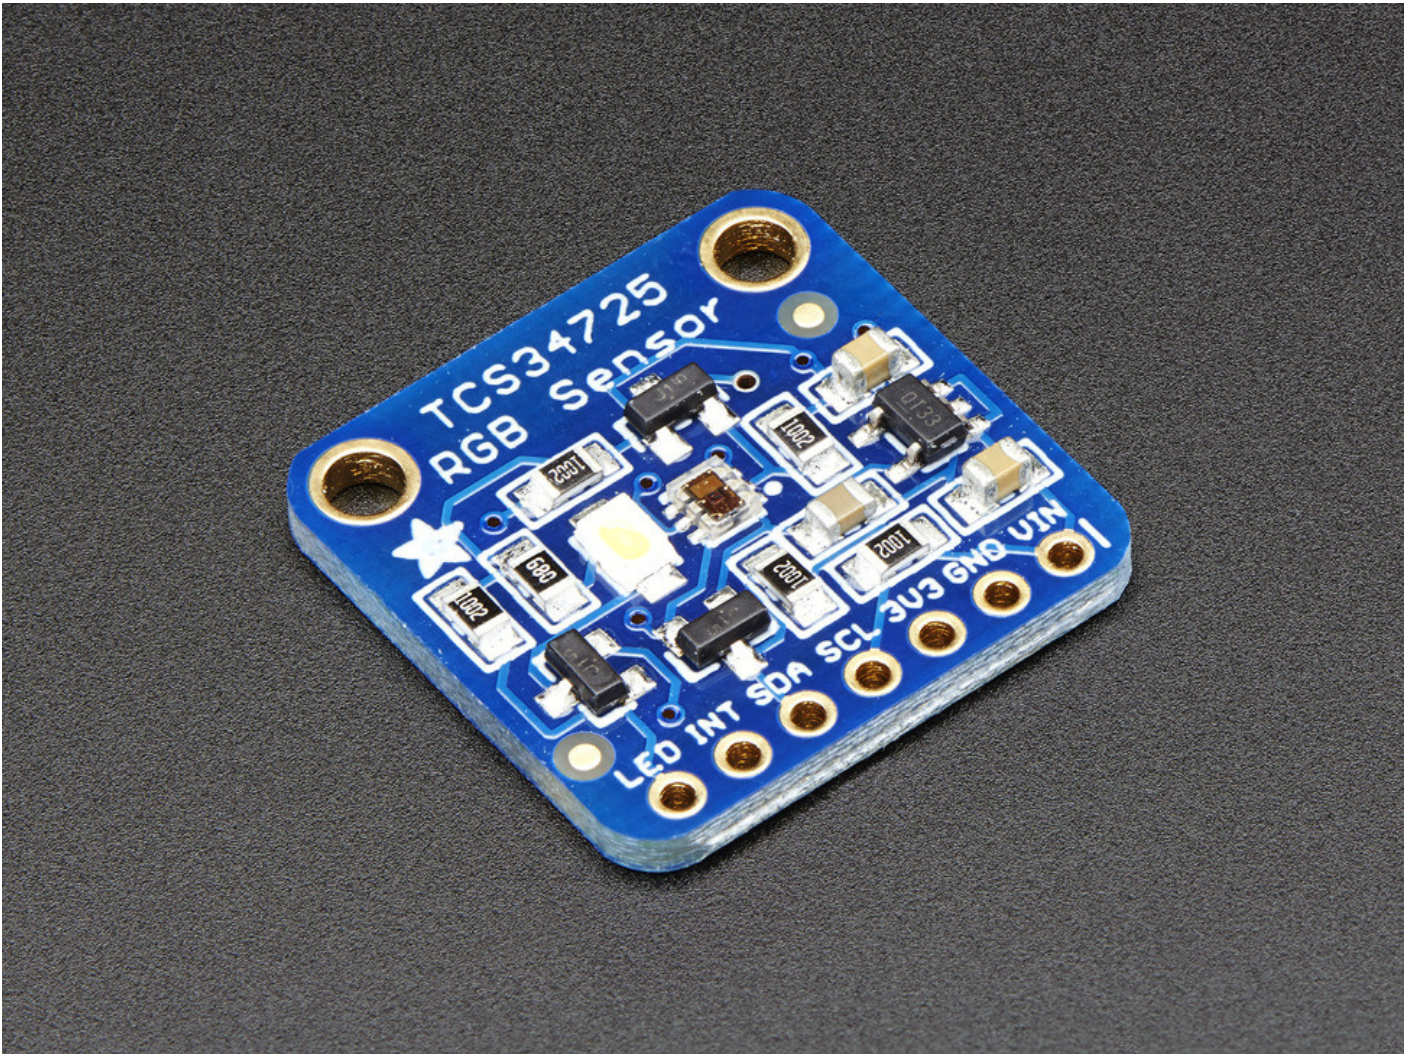

## What is I2C?

The TCS34725 has an I2C interface (SDA and SCL) that connects to the Arduino Board. The IC also has an optional interrupt output pin which can be used to interrupt Arduino.

I2C stands for Inter-Integrated Circuit. It is a bus interface connection protocol incorporated into devices for serial communication. I2C Communication Protocol uses only 2 bi-directional open-drain lines for data communication called SDA and SCL. Both these lines are pulled high. Each data bit transferred on SDA line is synchronized by a high to the low pulse of each clock on the SCL line.

1. Serial Data (SDA) – Transfer of data takes place through this pin.
2. Serial Clock (SCL) – It carries the clock signal.

### **Learn more about I2C**

## I2C on different Arduino boards

The two major models you can find in Creative Technology Lab are **UNO** and **LEONARDO**. Both have I2C function but have a different pinout. For **UNO**, the SDA pin is A4 and SCL pin is A5. For **LEONARDO**, the SDA pin is SDA(pin 20) and SCL pin is SCL(pin 21).

Not every Arduino model has I2C function and not all of them have the same pinout. Check the model before you hook it up with the TCS34725 sensor. **Learn more**

## Library

Adafruit TCS34725 will be used for this tutorial. We have a tutorial on **how to install a library** here.

## Wiring

For **LEONARDO**, it's more like matching labels.

1. GND - GND
2. VIN - 5V
3. SDA - SDA
4. SCL - SCL




1. GND - GND
2. VIN - 5V
3. SDA - A4
4. SCL - A5





name is `"/dev/cu.usbmodem14601"` so I changed the code like this. `port = new Serial(this, "/dev/cu.usbmodem14601", 9600);`

You can find your port name at the bottom of your Arduino IDE or go to Tools > Port > #####(Arduino #####).

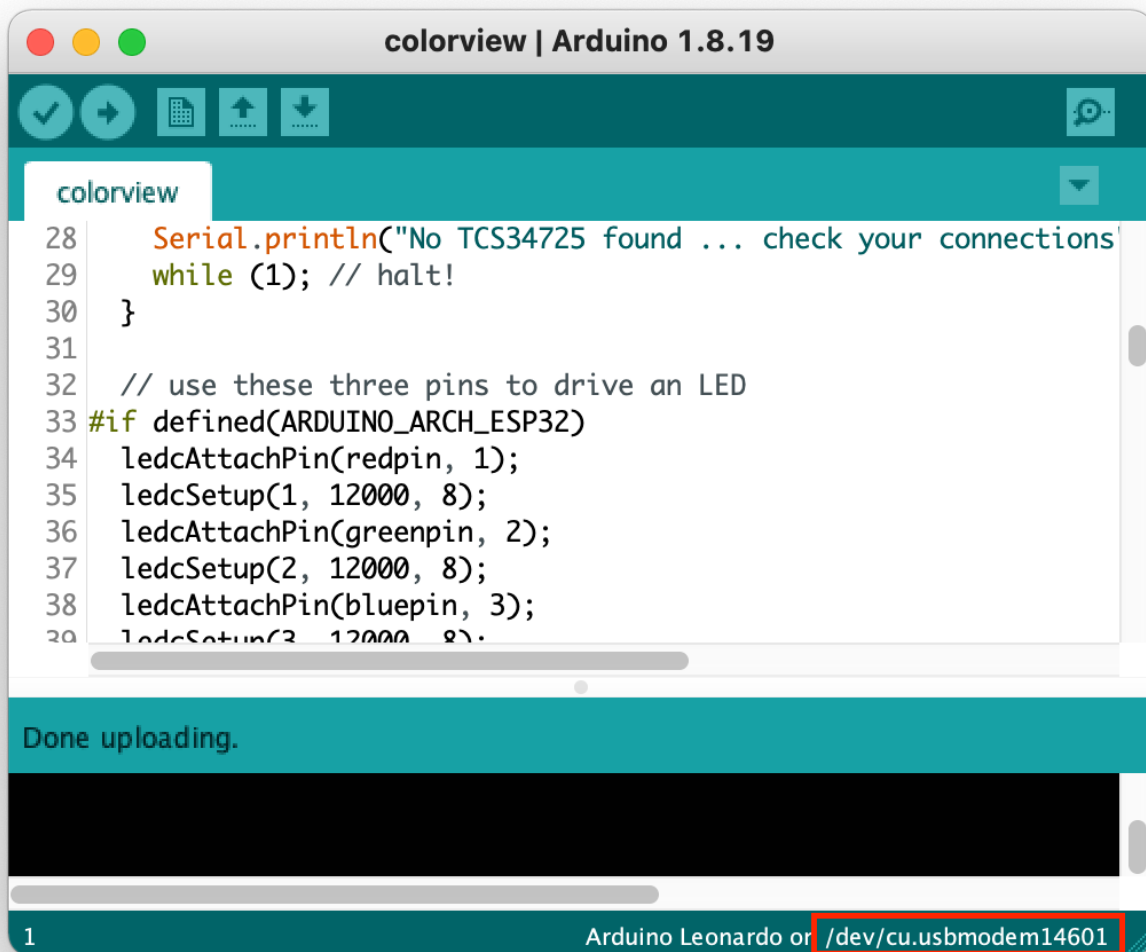

Revision #2

Created 11 November 2022 11:09:45 by Joanne Leung

Updated 16 December 2024 10:30:07 by Joanne Leung